
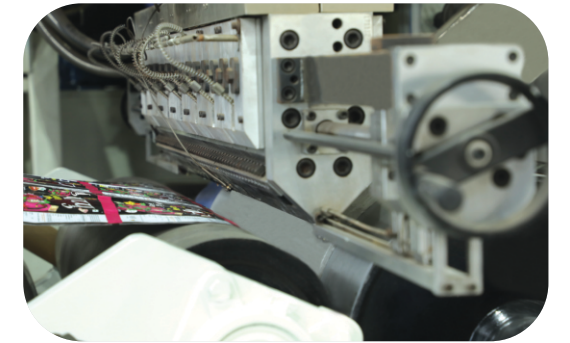


Co-Ex  
Lamination  
Plant

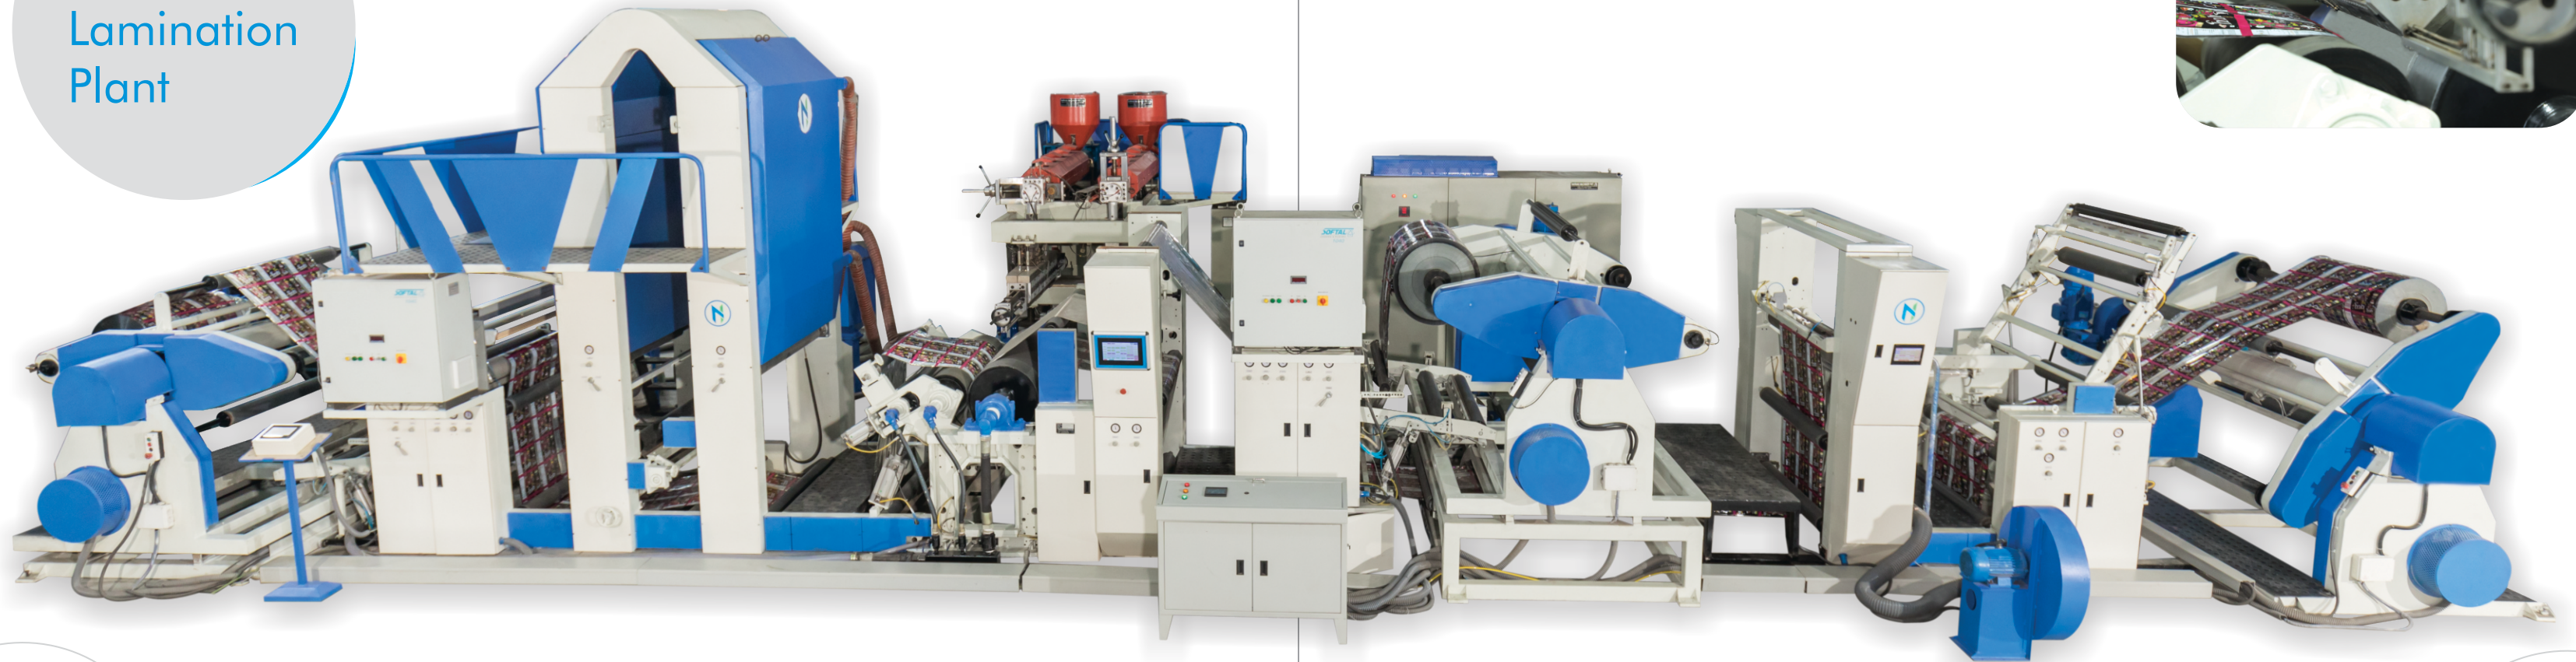

**Technical Specifications**

- Multi Layer Film Extrusion (AB, ABA)
- Web Width: 600 mm to 1650 mm.
- Primer Coater
- Auto Splicing System
- Turret Unwind & Rewind
- PLC Control System with
- Touch Screen HMI
- Corona Treater

**Suitable for**

- Four Ply Flexible Packaging for Namkeen & Pouches
- Multi Combination of Substrates like PET, BOPET, MET, PAPER, FOIL etc.
- Biscuits & Many More....

**Specifications**

Model	Screw Dia	Die Width	Output	Line Speed	Connecting Load	Dimension
LAMID FLEX 1250	65mm+65mm	1250 mm	160 Kg./Hr	200 M/Min*	178 Kw.	70x30x16 Ft. (LXWXH)
LAMID FLEX 1650	75mm+65mm	1500 mm	200 Kg./Hr	250 M/Min*	190 Kw.	70x35x16 Ft. (LXWXH)

\*Depending upon the type of Material & Gauge